


Laserliner

CompactCross-Laser Plus



Automatic cross-line laser with Bluetooth interface

Rev18W49

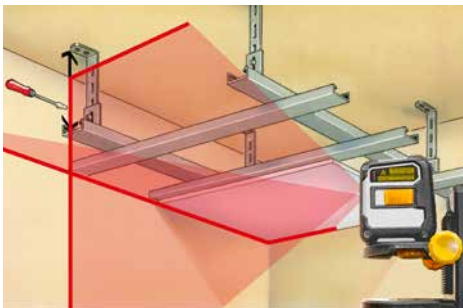

- With 2 clearly visible laser lines and additional slope function
- Bluetooth interface
- Individually switchable laser lines
- Height-adjustable bracket with 1/4" and 5/8" tripod threads and magnets



Multi-functional tripod-/wall mount


Automatic Level

Digital control panel (using app)

ARTICLE	ARTICLE NO	EAN-CODE	PU
CompactCross-Laser Plus	081.142A	4 021563 704972	5



TECHNICAL DATA
SELF-LEVELLING RANGE $\pm 4^\circ$
ACCURACY $\pm 0,35$ mm / m
OPERATING RANGE 15 m (depending on room illumination)
OPERATING RANGE WITH HAND RECEIVER 30 m (depends on how the technology affects the difference in brightness)
LASER WAVELENGTH 635 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY 2 x 1.5V alkaline batteries (type AA, LR6)
OPERATING TIME 14 hours (alkaline batteries)
OPERATING CONDITIONS -10°C ... 50°C, Max. humidity 80% rH, no condensation, Max. working altitude 4000 m above sea level
STORAGE CONDITIONS -10°C ... 70°C, MAX. HUMIDITY 80% RH
RADIO MODULE OPERATING DATA Bluetooth LE 4.x interface; Frequency band: ISM band 2400-2483.5 MHz, 40 channels; Transmission power: max. 10 mW; Bandwidth: 2 MHz; Bit rate: 1 Mbit/s; Modulation: GFSK/FHSS
DIMENSIONS (W x H x D) 75 x 88 x 58 mm
WEIGHT (incl. batteries) 246 g



CompactCross-Laser Plus
+ tripod-/wall mount
+ batteries (2 x type AA)
Packing dimension (W x H x D)
190 x 315 x 200 mm